

# Gas Pressure Regulator RMG 300 and RMG 300 „t“



## PRODUCT INFORMATION

**Serving the Gas Industry  
Worldwide**



## Gas Pressure Regulator RMG 300 and RMG 300 „t“

Application, characteristics, technical data

### Application

- device for systems acc. to DVGW worksheet G 600 (TRGI) or for RMG 300 „t“ G 600 (TRGI) and G495/II
- suitable for systems requiring dynamic regulation (gas furnaces)
- suitable for natural gas and all non-aggressive gas media

### Characteristics

- large inlet pressure range
- optional internal or external measuring connection
- actuator with pressure compensation
- easy maintenance due to exchangeable functional units
- control system with optional
  - integrated safety relief valve (SBV) for gas leakages
  - with vent valve RMG 915 (if SBV is blocked)
  - with safety diaphragm
- for RMG 300 „t“ separate thermally actuated locking device (TAE)
  - with memory metal as temperature sensor and actuator
  - with metal seal at the the gas pressure regulator inlet

TECHNICAL DATA				
max. inlet pressure $p_{max}$	16 bar (4 bar for RMG 300 „t“)			
outlet pressure range	outlet pressure range $W_{ds}$ in bar		setpoint spring	
	measuring unit 1	measuring unit 2	spring-No.	colour
	0,025 ... 0,045		1	grey
	0,035 ... 0,100		2	yellow
	0,080 ... 0,200		3	ivory
	0,150 ... 0,300		4	red
	0,250 ... 0,400		5	green
	0,300 ... 0,500	0,500 ... 0,800	6	light blue
0,400 ... 0,800	0,600 ... 2,000	7	dark blue	
	SAV and SBV adjustment ranges see page 3			
accuracy class and closing pressure categories	outlet pressure range in bar		AC	SG
	0,020 ... 0,030		10	30
	> 0,030 ... 0,050		10	20
	> 0,050 ... 0,500		5	10
	> 0,500 ... 2,000		2,5	10
flow rate coefficient (for natural gas, $\rho_n = 0,83 \text{ kg/m}^3$ )	valve seat diameter: 11 mm K <sub>G</sub> -value: 65 m <sup>3</sup> /h			
pipe size	DN 25			

## Gas Pressure Regulator RMG 300 and RMG 300 „t“

Application, characteristics, technical data

TECHNICAL DATA			
connection type	DIN flange PN 16; connection sizes according to DIN 2501		
material	main valve body	RMG 300	RMG 300“t“
	actuator casing	Al alloy	spheroidal graphite iron
	other pressure components	sheet steel	sheet steel
	internal components	St, Al alloy	St, Al alloy
	diaphragm, seals	St, Al, Ms	St, Al, Ms
TAE actuating temperature			approx. 100°C to 120°C
temperature class	-20 °C to +60 °C		
function and strength	as per DVGW VP200 (DIN 33822)		
PED/CE and DIN DVGW	approved		

SETPOINT RANGES FOR CONTROL UNITS K1A, K2A (SAFETY SHUT-OFF UNIT TYPE RMG 673)								
control unit	setpoint spring			upper response pressure $p_{so}^*$		lower response pressure $p_{su}^*$		
	No.	colour	wire dia. in mm	setpoint range $W_{ho}$ (bar)	re-engagement differential between response pressure and normal service pressure $\Delta p_o$ (bar)	setpoint range $W_{hu}$ (bar)	re-engagement differential between response pressure and normal service pressure $\Delta p_u$ (bar)	response pressure category** AG
K1a	1	yellow	2,5	0,04 ... 0,10	0,03			10/5
	2	light red	3,2	0,08 ... 0,25	0,05			10/5
	3	dark red	3,6	0,20 ... 0,50	0,10			5/2,5
	4	white	4,75	0,50 ... 1,50	0,25			5/2,5
	5	yellow	1,0			0,010 ... 0,015	0,012	15
	6	white	1,2			0,014 ... 0,040	0,03	15/5
	7	black	1,4			0,035 ... 0,120	0,06	5
K2a	2	light red	3,2	0,40 ... 0,80	0,1			10/5
	3	dark red	3,6	0,60 ... 1,60	0,2			10/5
	4	white	4,75	1,50 ... 4,50	0,3			5/2,5
	5	light blue	1,1			0,06 ... 0,15	0,05	15/5
	6	black	1,4			0,12 ... 0,40	0,1	5

\*) Note: Where control devices are being used simultaneously for lower and upper actuating pressures, the difference between the two setpoint values  $p_{so}$  and  $p_{su}$  must be at least 10% greater than the sum of the re-engagement differentials  $\Delta p_o$  and  $\Delta p_u$ .

\*\*) The higher AG group applies to the first half, the lower AG group to the second half of the setpoint range.

## Gas Pressure Regulator RMG 300 and RMG 300 „t“

Application, characteristics, technical data


SETPOINT RANGE FOR LEAKAGE SAFETY RELIEF VALVE (SBV)		
only for measuring unit 1 and $p_a \leq 500$ mbar:		
With setpoint spring 1 - 7	SBV spring dia. 2.5 mm	10 mbar to 100 mbar above $p_a$

CONNECTIONS OF MEASURING AND VENTING LINES	
measuring line* for pilot and SAV unit	R 1/4"; pipe 10 x 1.5 / E 10 (solderless pipe union with cutting ring according to DIN 2353)
venting line/relief line** for pilot	R 1/2", pipe 12 x 1.5 / E12 (solderless pipe union with cutting ring according to DIN 2353) or venting valve RMG 915 (not for dynamic regulating systems)
venting line for SAV units K1a/K2a	M 16 x 1,5; pipe 12 x 1.5 / E 12 (solderless pipe union with cutting ring according to DIN 2353) or venting valve RMG 915 or tripping valve RMG 919 with outside vent

\*) not applicable for devices with internal measuring connection

\*\*) not applicable for devices with safety diaphragm

WEIGHTS		
RMG 300, RMG 300 „t“	SAV	
	without	with
	4kg	5kg

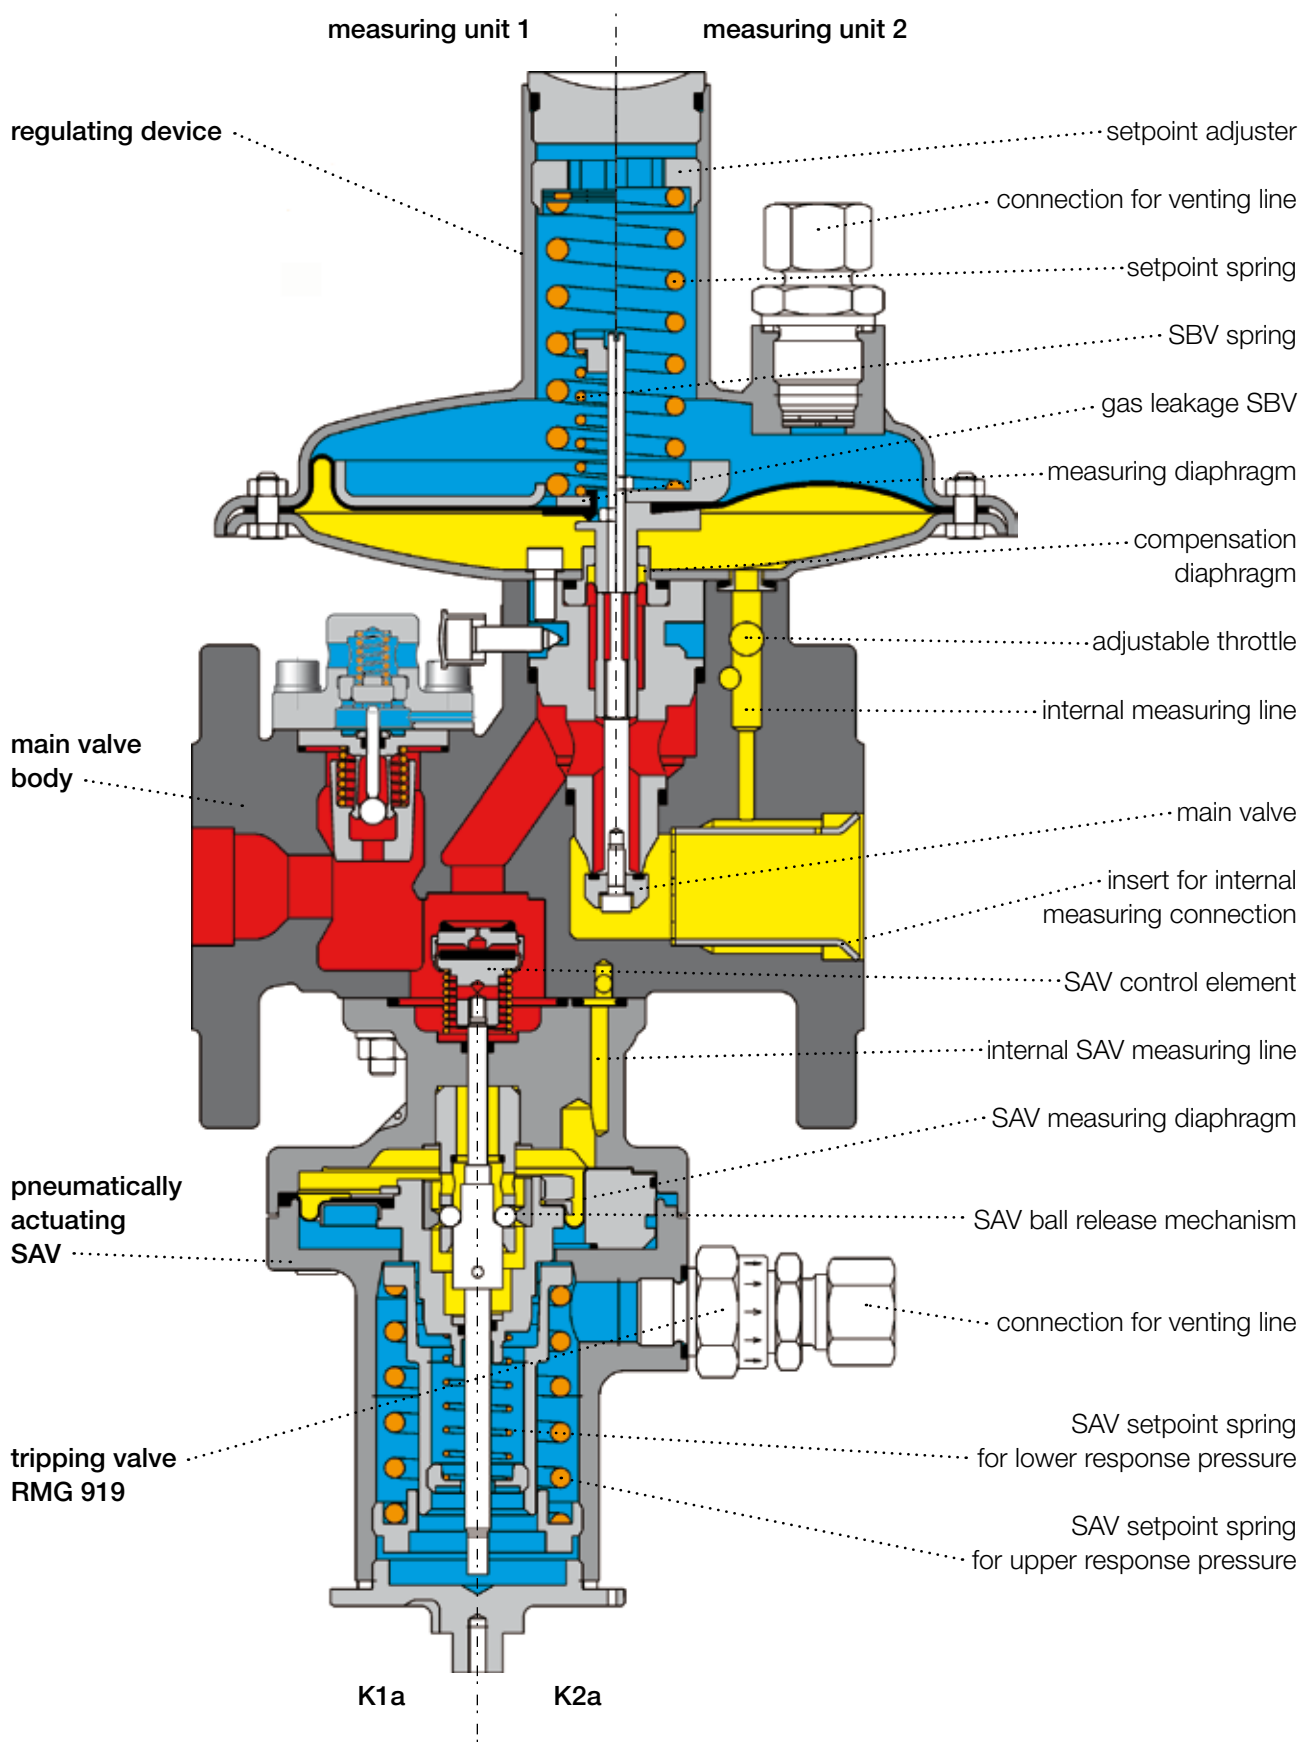


- inlet pressure
- outlet pressure
- atmosphere

Example 1: RMG 300 „t“ with internal measuring connection and gas leakage SBV in measuring unit 1, with safety stop valve (SAV) K1a, K2a and tripping valve RMG 919

# Gas Pressure Regulator RMG 300 and RMG 300 „t“

Design and operation

6

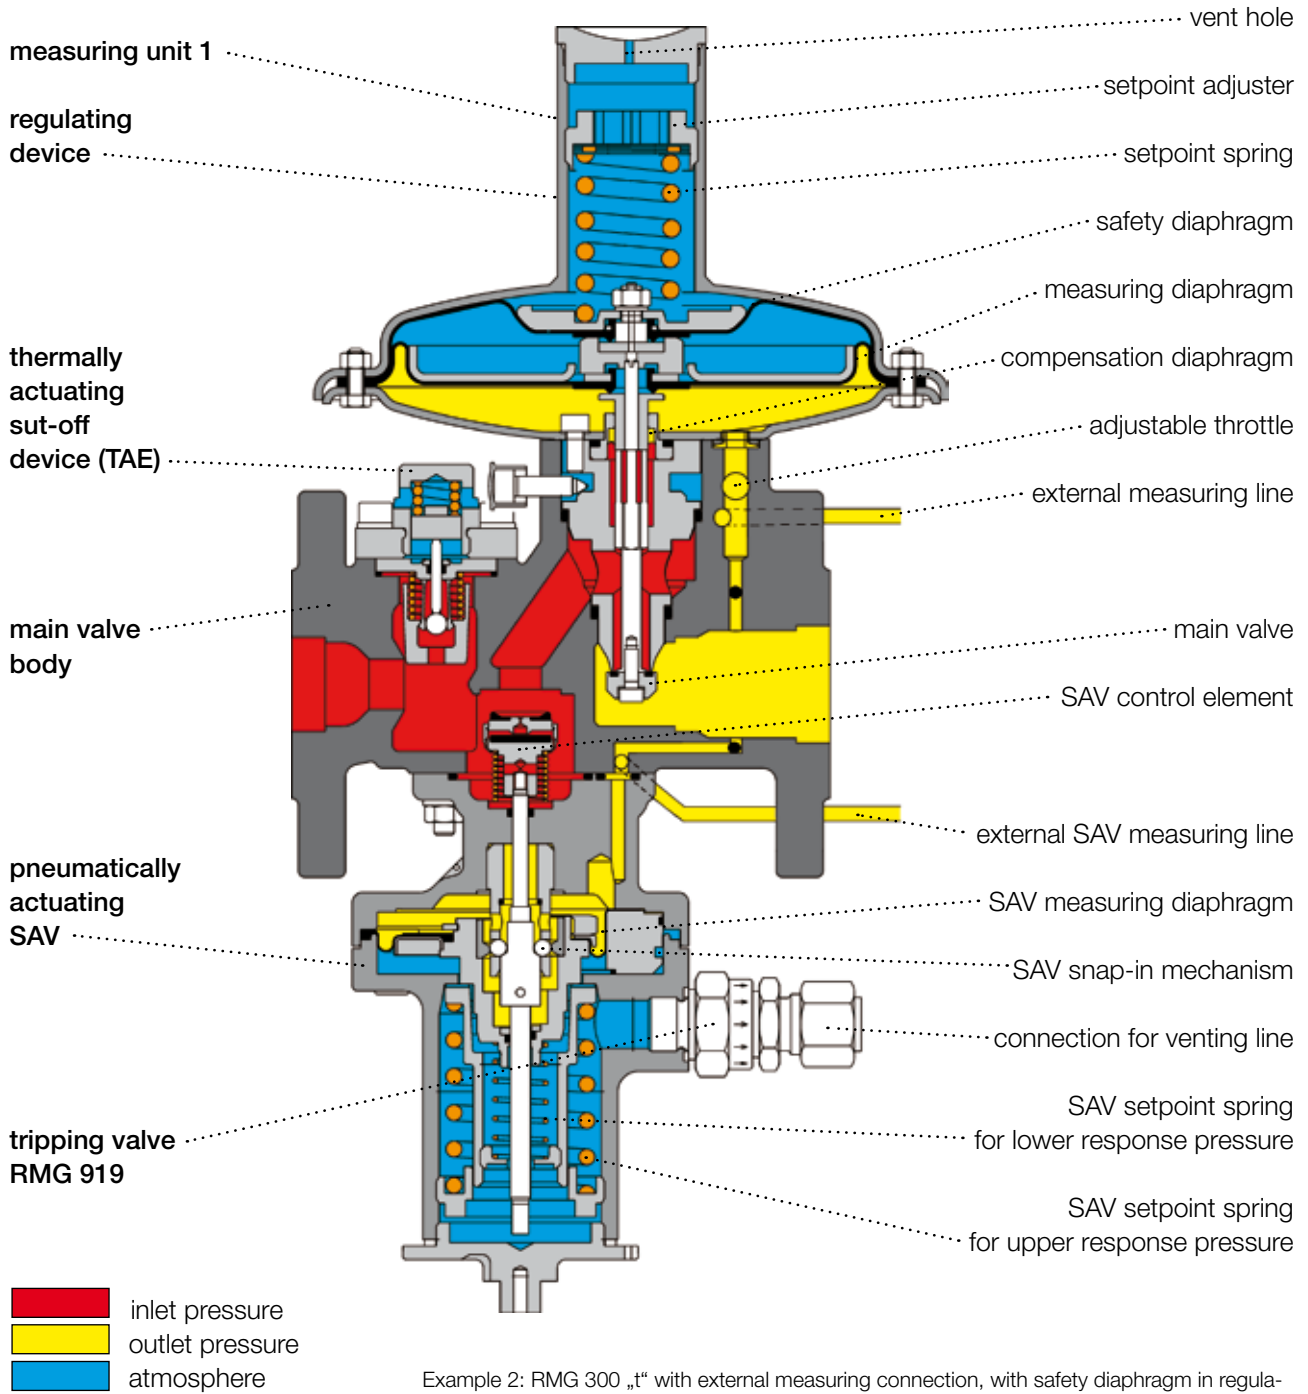

Example 2: RMG 300 „t“ with external measuring connection, with safety diaphragm in regulating device, with safety stop valve (SAV) K1A (K2A) and tripping valve RMG 919

The gas pressure regulators RMG 300 and RMG 300 „t“ are designed to keep the outlet pressure in the pipe system constant within given limits irrespective of gas delivery changes and changes of the inlet pressure. The gas regulator RMG 300 consists of the functional components „pilot“ and „SAV unit“; the RMG 300 „t“ has an additional thermally actuating shut-off device (TAE). The functional components can easily be removed from the main valve body after loosening the corresponding connection bolts.

This modular design allows to immediately renew the faulty functional unit with a tested replacement unit during an operational failure. The same applies during maintenance of the device. The regulating device consists of the main valve with valve plate and valve seat, the compensation diaphragm, and the measuring unit with measuring diaphragm, setpoint spring and setpoint adjuster. The safety shut-off device (SAV) consists of the SAV control element and the corresponding control units K1a or K2a.

The main valve body contains measuring bore holes which enable connecting an internal measuring connection for the pilot and SAV. When using external measuring lines the internal connections are sealed using balls pressed into the bore holes.

An adjustable throttle at the main valve body is used to tune the pilot to the pressure system. Optionally the safety relief valve for gas leakages (SBV) can be fitted to the regulating device. It is not required where a safety diaphragm has been fitted or is blocked when the venting valve RMG 915 is being added.

The output pressure to be regulated is directed from the measuring point to the underside of the measuring diaphragm. This senses the actual output pressure and compares it with the setpoint preset by the adjustable setpoint value (spring tension). Any difference directly effects the main valve position via the valve rod. The resulting change in flow leads to an alignment of the actual output pressure to the setpoint value. At zero consumption the device seals off completely.

The SAV control unit monitors the output pressure at the measuring point (internal or external). When one of the preset release pressure values is reached, the SAV measuring diaphragm moves with the tripping device into the corresponding release position, the ball release mechanism releases the valve rod, and the SAV control element seals tight.


### RMG 300 „t“ thermally actuating shut-off device (TAE)

#### CAUTION!

The TAE device is pre-tensioned by a spring.

#### Design:

The thermally actuating shut-off device TAE is integrated into the inlet of the spheroidal graphite iron main valve body and consists of temperature sensor, closing mechanism, closing body, and the valve seat positioned in the main valve body. The closing body is normally locked in the open position. The ball switch is located between the two snap-in pins on the outer collars on which the closing body rests, tensioned by the closing spring. The push rod located above the ball switch is in contact with the temperature sensor designed as a spring made from so-called memory metal. The cover surrounding the memory metal spring features holes which allow the ambient temperature to affect the sensor directly.

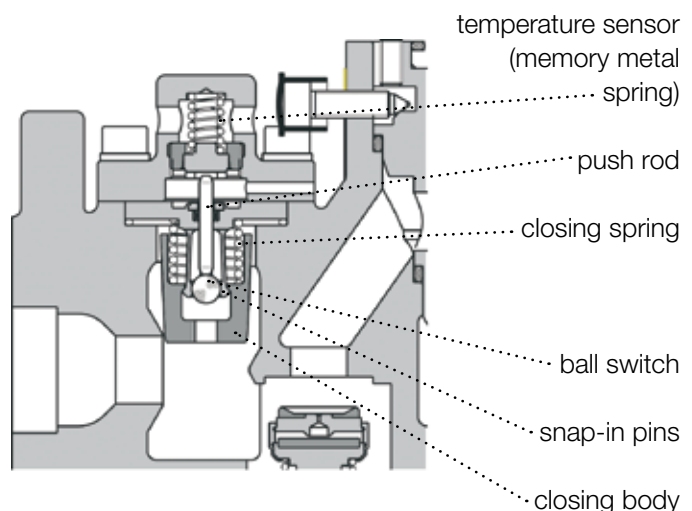


TAE open


# Gas Pressure Regulator RMG 300 and RMG 300 „t“

## Design and operation

Should the ambient temperature exceed the response temperature of the memory metal, the spring will extend longitudinally. Via the push rod the resulting high pressure forces the ball switch out of the snap-on pins. The conical closing body is set free and pressed by the pressure of the closing spring into the closing position between the valve seat and the abutment centred upon it. This design guarantees a safe closure. The closing body uses a material with a heat extension coefficient greater than that of the casing material. This produces increasingly greater closing forces with further rising temperature, aiding the safe closure.

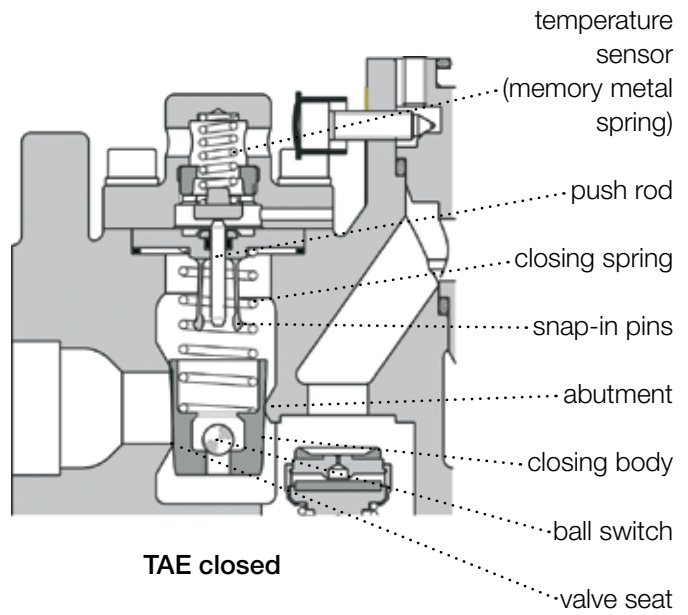


The diagram shows the typical leakage behaviour for the gas regulator RMG 300 "t" given the test conditions according to VP200 (DIN 33822).

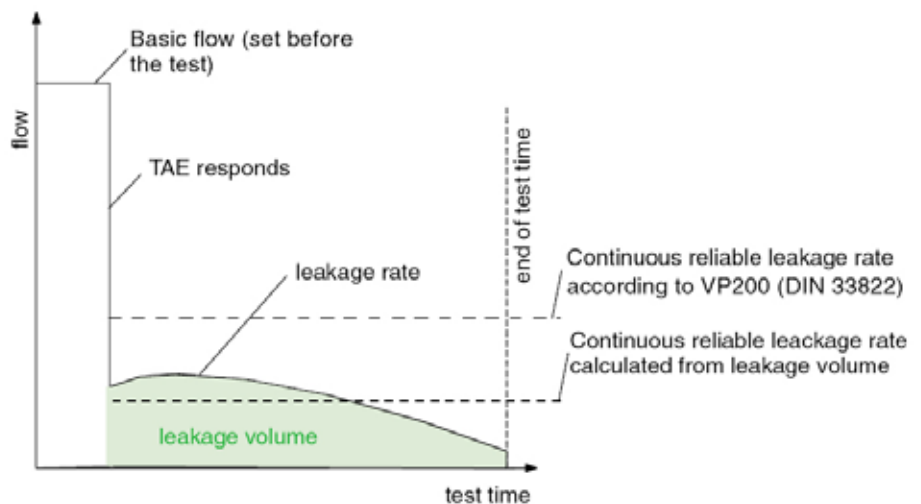

Device designation

The diagram below applies to gas pressure regulators RMG 300 and RMG 300 „t“ with integral SAV unit. It indicates the nominal flow for natural gas as a function of inlet pressure  $p_e$  and outlet pressure  $p_a$ .

Nominal flow diagram for gas pressure regulator RMG 300 „t“

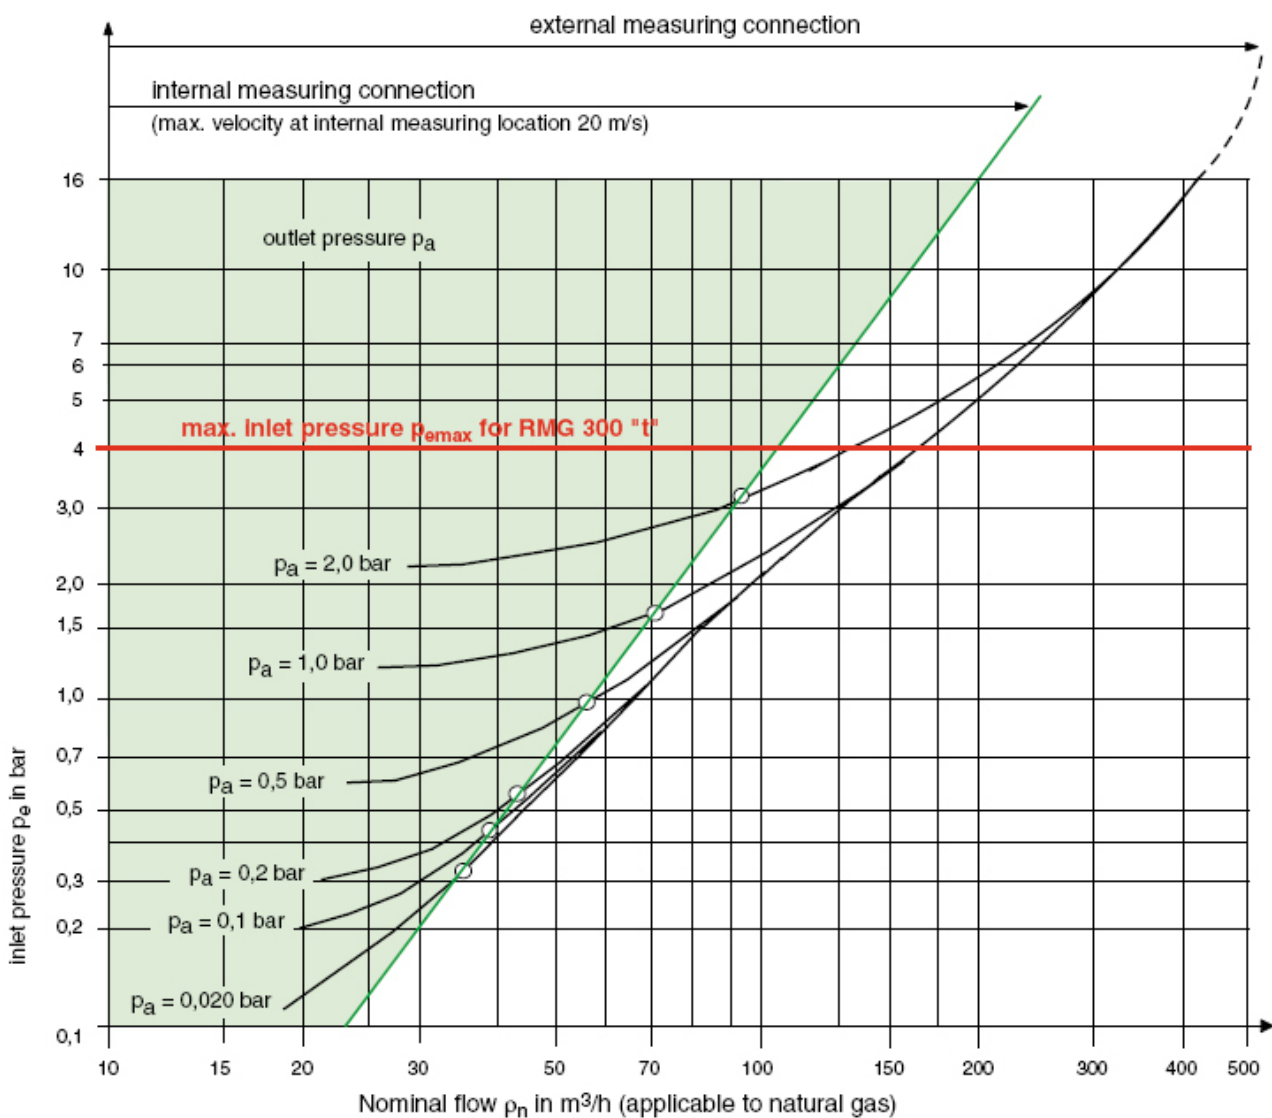


The maximum nominal flow values  $q_n$  can normally only be achieved where the outlet pipe is widened to a larger size. A maximum nominal flow of approx. 20 m/s also applies for this measuring point.

# Gas Pressure Regulator RMG 300 and RMG 300 „t“

## Dimensions

10

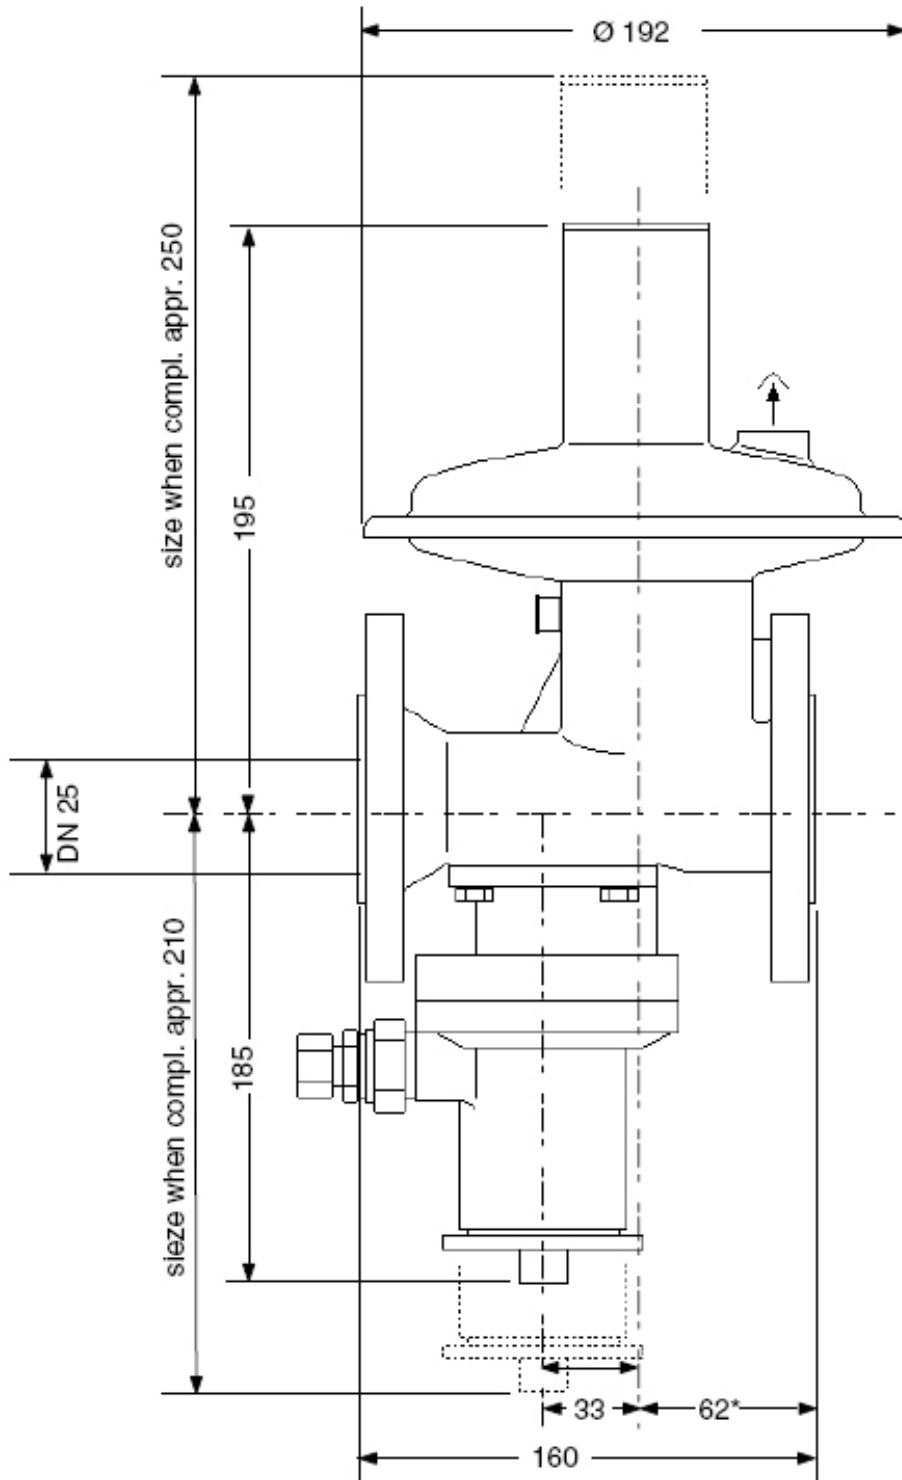

\*) 59 mm for RMG 300 „t“

example:

RMG 300 „t“ - 25 / 1 - K1a / 0 - 11 / 1L / 4 - So

REGULATOR DESIGNATION				
<b>Design</b>				
without TAE				„t“
with TAE				
<b>pipe size / measuring connection</b>				
pipe size		measuring connection		
DN 25		internal		1
		external		2
<b>SAV set range</b>				
SAV-control unit		set range in bar $W_{ho}$	set range in bar $W_{hu}$	
K1a		0,040 to 1,500	0,010 to 0,120	K1a
K2a		0,400 to 4,500	0,060 to 0,400	K2a
<b>Remote indication</b>				
without				0
for K 1a or K 2a				F
<b>Valve seat diameter</b>				
Valve seat diameter 11mm				11
<b>Pilot with</b>				
Actuator 1 with gas leak SBV				1L
Actuator 1 with blocked gas leak SBV				1
Actuator 1 with safety diaphragm				1S
Actuator 2				2
<b>setpoint spring No. / colour</b>		<b>Set range <math>W_h</math> in bar for actuator 1</b>	<b>Set range <math>W_h</math> in bar for actuator 2</b>	
1	grey	0,020 to 0,045		1
2	yellow	0,035 to 0,100		2
3	ivory	0,080 to 0,200		3
4	red	0,150 to 0,300		4
5	green	0,250 to 0,400		5
6	light blue	0,300 to 0,500	0,5 to 0,8	6
7	dark blue	0,400 to 0,800	0,6 to 2,0	7

pipe size

special features (to be detailed)

### **For More Information**

To learn more about RMG's Advanced Gas Solutions, contact your RMG account manager or visit [www.rmg.com](http://www.rmg.com)

### **GERMANY**

#### **Honeywell Process Solutions**

RMG Regel + Messtechnik GmbH  
Osterholzstrasse 45  
34123 Kassel, Germany  
Tel: +49 (0)561 5007-0  
Fax: +49 (0)561 5007-107

#### **Honeywell Process Solutions**

RMG Messtechnik GmbH  
Otto-Hahn-Strasse 5  
35510 Butzbach, Germany  
Tel: +49 (0)6033 897-0  
Fax: +49 (0)6033 897-130

#### **Honeywell Process Solutions**

RMG Gaselan Regel + Messtechnik GmbH  
Julius-Pintsch-Ring 3  
15517 Fürstenwalde, Germany  
Tel: +49 (0)3361 356-60  
Fax: +49 (0)3361 356-836

#### **Honeywell Process Solutions**

WÄGA Wärme-Gastechnik GmbH  
Osterholzstrasse 45  
34123 Kassel, Germany  
Tel: +49 (0)561 5007-0  
Fax: +49 (0)561 5007-207

### **POLAND**

#### **Honeywell Process Solutions**

Gazomet Sp. z o.o.  
ul. Sarnowska 2  
63-900 Rawicz, Poland  
Tel: +48 (0)65 5462401  
Fax: +48 (0)65 5462408

### **ENGLAND**

#### **Honeywell Process Solutions**

Bryan Donkin RMG Gas Controls Ltd.  
Enterprise Drive, Holmewood  
Chesterfield S42 5UZ, England  
Tel: +44 (0)1246 501-501  
Fax: +44 (0)1246 501-500

### **CANADA**

#### **Honeywell Process Solutions**

Bryan Donkin RMG Canada Ltd.  
50 Clarke Street South, Woodstock  
Ontario N4S 0A8, Canada  
Tel: +1 (0)519 5398531  
Fax: +1 (0)519 5373339

### **USA**

#### **Honeywell Process Solutions**

Mercury Instruments LLC  
3940 Virginia Avenue  
Cincinnati, Ohio 45227, USA  
Tel: +1 (0)513 272-1111  
Fax: +1 (0)513 272-0211

### **TURKEY**

#### **Honeywell Process Solutions**

RMG GAZ KONT. SIS. ITH. IHR. LTD. STI.  
Birlik Sanayi Sitesi, 6.  
Cd. 62. Sokak No: 7-8-9-10  
TR - Sasmaz / Ankara, Turkey  
Tel: +90 (0)312 27810-80  
Fax: +90 (0)312 27828-23

