


Non Return Valves Series 590 Rollchek



PRODUCT INFORMATION

**Serving the Gas Industry
Worldwide**

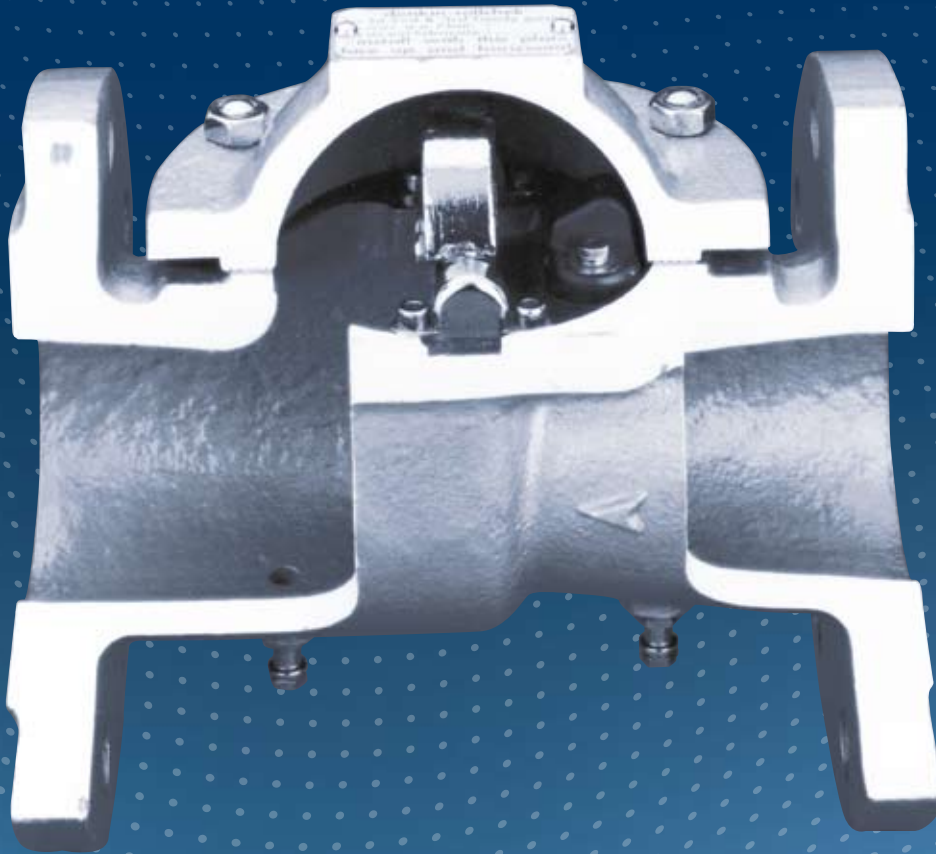

NON RETURN VALVES SERIES 590 ROLLCHEK


Application

- Non-return valves are a means of preventing a reverse flow and must be fitted (Gas Act 1972) in the gas line where air at higher pressure is mixed with fuel gas prior to combustion and many types of industrial burners. Non-return valves should also be fitted in the corresponding air line where there is a possibility of the pressure falling below that of the gas, a condition frequently encountered when starting up. Larger sizes of non-return valves can be fitted on the outlet side of the gas meter to give general protection and smaller sizes should be fitted on the inlet pipe to any appliance where gas and air are mixed.
- Failure to fit non-return valves in these circumstances can result in an explosive gas/air mixture being formed within the pipework. Bryan Donkin RMG non-return valves, which give a positive seal under all conditions of reverse pressure up to 7 barg, provide complete protection from such explosions.
- The Series 590 is designed to meet the Standard for non-return valves IM/14.

Features

- Easy Fitting - Compact design for horizontal fitting only, valve is supplied complete with inlet strainer, inlet and outlet pressure test points as standard.
- Easy Maintenance - Lubricationless design is fully serviceable in situ.
- Top Performance - Valve has high throughput capacities and gives positive seal under all conditions of reverse pressure up to 7 Barg (100 psig), and minimal forward pressure loss up to a maximum working pressure of 7 Barg (100 psig).


SERVICE CONDITIONS	
Size Range:	Screwed: 2" & 3" to BS 21 Rc
	Flanged: DN 80, DN 100 & DN 150 to PN16:BS EN 1092-2:1997
Maximum Inlet Pressure and Maximum Reverse Pressure:	7 Barg (100 psig)
Temperature Range:	-10°C to +60°C
Flow Medium:	Natural Gas and non-aggressive gases.

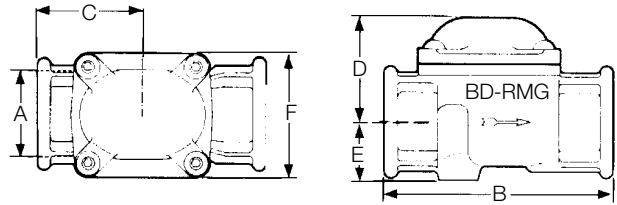

Note: for simplicity, only the screwed version is shown.

DIMENSIONS & WEIGHTS						
A	B	C	D	E	F	Wt
2" screwed	195mm	90mm	111mm	53mm	165mm	8.7kg
3" screwed	200mm	90mm	111mm	53mm	165mm	13kg
DN 80 FL	241mm	120mm	111mm	-	165mm	16kg
DN 100 FL	292mm	146mm	134mm	-	188mm	23kg
DN 150 FL	356mm	178mm	192mm	-	235mm	43kg

Performance

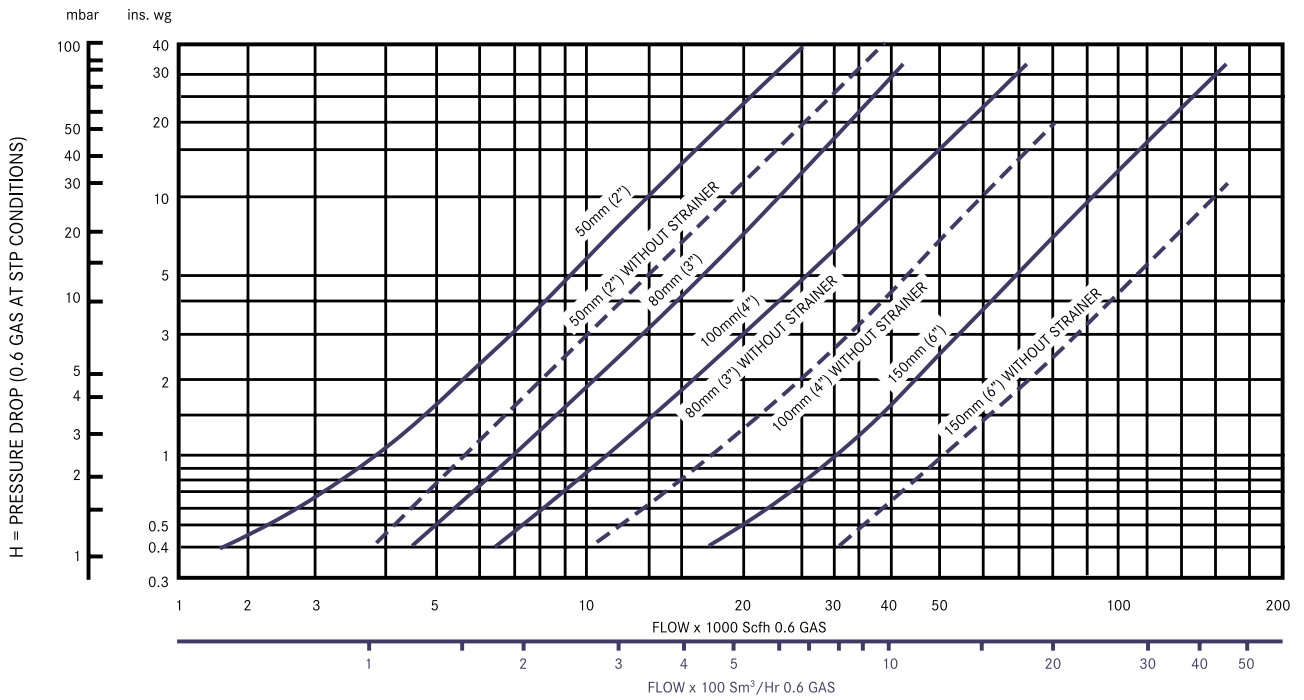

Valve Maximum Capacity Gas Velocity based on nominal pipe sizes, must not exceed 75m/s (245 ft/s).
At S.T.P. Conditions the pressure drop may be obtained directly from the graph.
For other pressure conditions the following formulae apply:

$$\text{Pressure Drop} = H \text{ (mbar)} \times \frac{1.013}{P_u \text{ (bar abs)}} \text{ mbar}$$

or

$$\text{Pressure Drop} = H \text{ (in. WG.)} \times \frac{14.7}{P_u \text{ (psi abs)}} \text{ in WG.}$$

Where: **H = Pressure Drop from Graph.**
Pu = Absolute Upstream Pressure.

For More Information

To learn more about RMG's advanced gas solutions, contact your RMG account manager or visit www.rmg.com

GERMANY

Honeywell Process Solutions

RMG Regel + Messtechnik GmbH
Osterholzstrasse 45
34123 Kassel, Germany
Tel: +49 (0)561 5007-0
Fax: +49 (0)561 5007-107

Honeywell Process Solutions

RMG Messtechnik GmbH
Otto-Hahn-Strasse 5
35510 Butzbach, Germany
Tel: +49 (0)6033 897-0
Fax: +49 (0)6033 897-130

Honeywell Process Solutions

RMG Gaselan Regel + Messtechnik GmbH
Julius-Pintsch-Ring 3
15517 Fürstenwalde, Germany
Tel: +49 (0)3361 356-60
Fax: +49 (0)3361 356-836

Honeywell Process Solutions

WÄGA Wärme-Gastechnik GmbH
Osterholzstrasse 45
34123 Kassel, Germany
Tel: +49 (0)561 5007-0
Fax: +49 (0)561 5007-207

POLAND

Honeywell Process Solutions
Gazomet Sp. z o.o.
ul. Sarnowska 2
63-900 Rawicz, Poland
Tel: +48 (0)65 5462401
Fax: +48 (0)65 5462408

ENGLAND

Honeywell Process Solutions

Bryan Donkin RMG Gas Controls Ltd.
Enterprise Drive, Holmewood
Chesterfield S42 5UZ, England
Tel: +44 (0)1246 501-501
Fax: +44 (0)1246 501-500

CANADA

Honeywell Process Solutions

Bryan Donkin RMG Canada Ltd.
50 Clarke Street South, Woodstock
Ontario N4S 0A8, Canada
Tel: +1 (0)519 5398531
Fax: +1 (0)519 5373339

USA

Honeywell Process Solutions

Mercury Instruments LLC
3940 Virginia Avenue
Cincinnati, Ohio 45227, USA
Tel: +1 (0)513 272-1111
Fax: +1 (0)513 272-0211

TURKEY

Honeywell Process Solutions

RMG GAZ KONT. SIS. ITH. IHR. LTD. STI.
Birlik Sanayi Sitesi, 6.
Cd. 62. Sokak No: 7-8-9-10
TR - Sasmaz / Ankara, Turkey
Tel: +90 (0)312 27810-80
Fax: +90 (0)312 27828-23